



# Technical sheet Mobitec 35


Self-propelled mini-crane with on board operator for glazing installation

Updated September 21\* 2020











<u>Technical specifications</u>	
Maximal load	350 kg
Unladen weight (Full options)	610 kg
Traction batteries	24V – IIO Ah
Hydraulic power station engine	2 kW
Translation power engine	0,6 kW
Unladen admissible slope	15 %

(\*) Mini-crane created and made by Mobilev, vacuum lifting beam created and made by Axitec

Mobilev Cranes
PA des Grandes Terres
I305 route de Lozanne
69 380 DOMMARTIN - FRANCE


Tél: +33 (0)4 72 88 21 05



# Technical sheet Mobitec 35

Self-propelled mini-crane with on board operator for glazing installation

Page 2/2

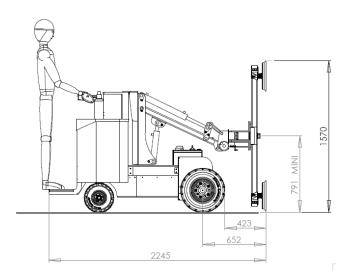



# 822

## Standard equipment

Vertical hydraulic mast 700 mm stroke
Vacuum lifting beam with I80° hydraulic tilt
Electric front wheel drive with differential gear
Brake-operated

Automatic, electric or manual disconnection of the brake

Tiller with accelerator

Folding operator platform

Vacuum lifting beam (360 ° continuous manual rotation)

Vacuum reserve and alarm

Vacuum pump securely with automatic restart

Remote pick and place

Hour meter and battery charge indicator

Charger board electronic

Tyre puncture-proof wheels Full Flexible

buzzer

Axes slinging

Hydraulic & electric safety devices